

ルーターとの接続確認

1. スマホのアプリで動体検知範囲を設定する対象カメラの右側にあるインフォメーションマックをタップし、「カメラ設定」→「デバイス情報」から、該当カメラの IP アドレスを確認します。



← バック カメラ設定

スケジュール録画 >

Audio設定 >

ビデオ設定 >

WIFI設定 >

SDカード設定 >

時間設定 >

Email設定 >

FTP設定 >

システム設定 >

デバイス情報 >



カメラ



画像




ビデオ



アバウト

2. LAN ケーブルでカメラお使いのパソコンでの IE ブラウザーを起動し、アドレス欄にカメラの IP アドレスをご入力してから、「PC View」をクリックしてください。

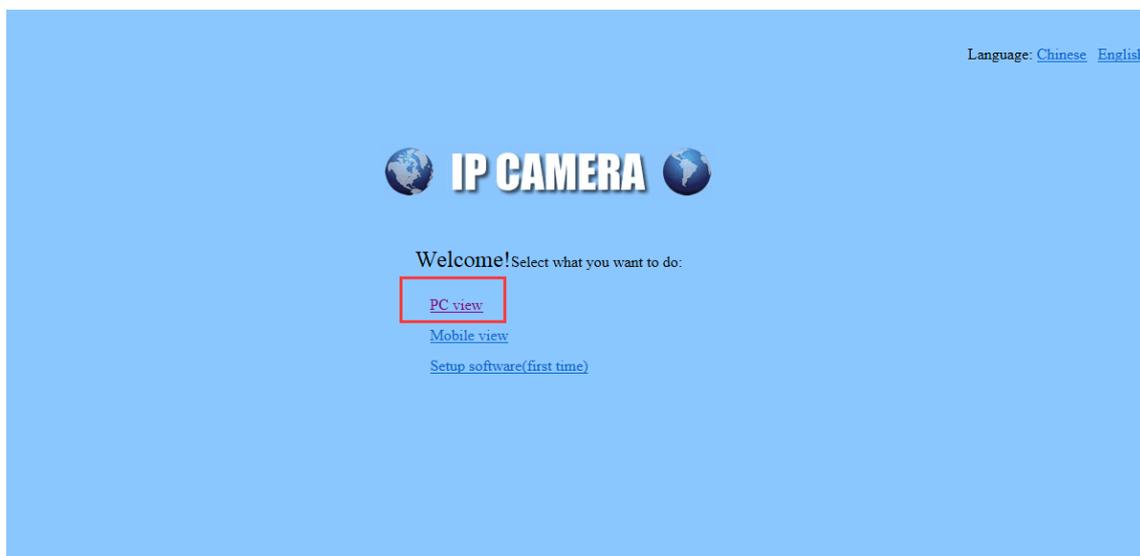

3. 「Settings」 → 「Network」 → 「Wireless」 をクリックしてから、右側に、お使いのルーターの **SSID** とパスワードをご入力してください。その後、「Check」 ボタンをクリックし、ルーターの **SSID** とパスワードに特殊な文字があるかどうかシステムでのチェックを起動します。

ルーターの **SSID** とパスワードに特殊な文字があれば、**WiFi** 接続設定が失敗とのエラーメッセージが出ますが、特に問題がなければ、**WiFi** 接続設定が成功したとのメッセージが見えたら、⑤の「Apply」 をクリックすれば、**WiFi** 設定が完了となります。

The screenshot displays the IP CAMERA web interface. The sidebar on the left contains the following menu items: Monitor, Settings (highlighted with a pink arrow and labeled '1'), Media, Network (highlighted with a pink arrow and labeled '2'), Network, Wireless (highlighted with a pink arrow and labeled '3'), Ddns, Platform, QNMF, P2P, Alarm, Advanced, and System. The main content area is titled 'Wireless' and includes the following fields: 'Enable Wireless' (radio buttons for On and Off), 'SSID' (text input with 'ctronics' and a 'search' button), 'Security mode' (dropdown menu showing 'WPA-PSK'), 'WPA Algorithm' (dropdown menu showing 'AES'), 'Key' (password input), and 'Re-type key' (password input). A 'check' button is highlighted with a red box and labeled '4'. Below these fields are 'Apply' and 'Cancel' buttons, with 'Apply' highlighted by a red box and labeled '5'. On the right side, a browser window titled 'Check WiFi - Internet Explorer' shows the URL 'http://192.168.3.237/web/check.html'. The browser content displays the message: 'Checking WiFi, please wait about 30 seconds.' followed by 'Connected to WiFi successfully. Select "Apply" to save these settings.' and a 'close' button.